


EG02000


Invasive Blood Pressure Module

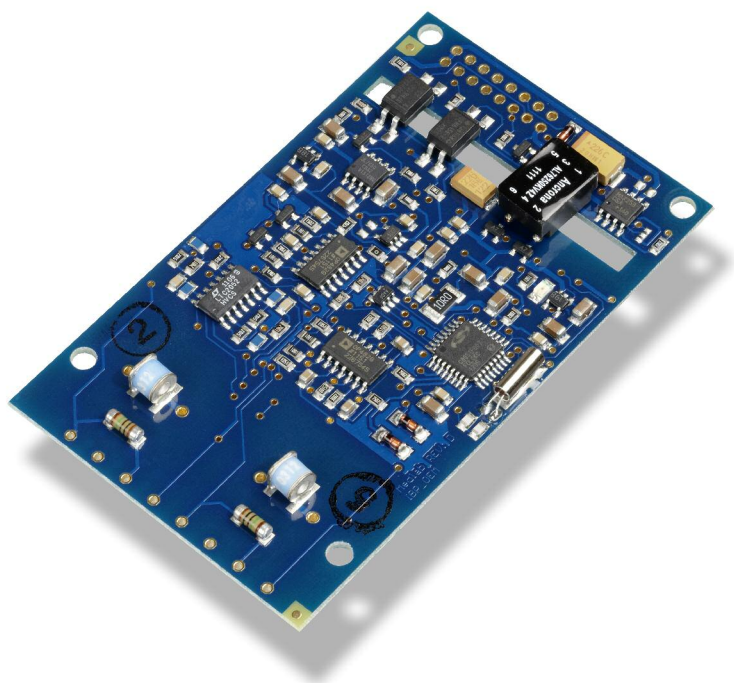

IBP

oem.medlab.eu

- Two channels
- Works with standard pressure transducers of 5 $\mu\text{V/V/mmHg}$
- Simulation mode built-in for easy integration into user system
- Waveform transmission speed selectable (50, 100 and 150 Hz)
- Displays static pressures and waveforms
- Integrated pulse rate detection: 30 bpm - 250 bpm
- Automatic detection of systolic, mean, and diastolic blood pressure
- Measuring range -10 mmHg to +300 mmHg (+/- 1 % accuracy)
- In addition, zero level can be shifted by +/- 50 mmHg
- Zeroing commands built-in - independently for both channels
- Transmission of pulse rate, systolic-, mean-, and diastolic pressure
- Status messages and commands sent over the serial interface
- Lifetime calibration
- Complies with IEC601-2-34
- Defibrillation protection and Patient isolation built-in
- Very small size: 88 x 53 mm, maximum thickness 10 mm
- Power supply: 5 Volt, one supply voltage only
- Power consumption: 0.5 W max, depending on transducer impedance

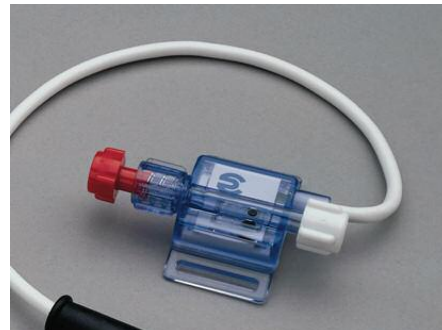

medlab

medizinische Diagnosegeräte GmbH
Helmholtzstrasse 1
D 76297 Stutensee near Karlsruhe
Germany

Tel.: +49 (0) 7244 74110 0

FAX: +49(0) 7244 74110 28

sales@medlab.eu

oem.medlab.eu